



ALLEGRO Z6

LINEAR FIXTURE WITH ZOOM
& 6x RGBW LEDs



ALLEGRO Z6




FEATURUES:

- Motorized Zoom (3.5 ~ 38-degrees)
- Tilt Lock for stable transporting
- USB Input for Updating Fixture Firmware
- Folding carrying handle
- Rubber feet so fixture can be set on the ground
- All metal construction with black housing
- Includes 2 Omega brackets for mounting to truss
- Flicker Free, 1200Hz PWM frequency



3.5-degrees

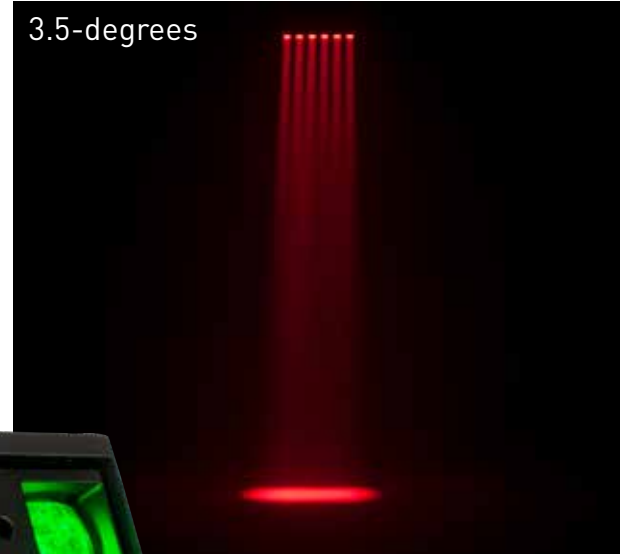

38-degrees



LIGHT SOURCE:

- LED: 6x 30W QUAD (4-In-1) RGBW LEDs (30,000 hr.)
- Motorized Zoom: 3.5° ~ 38°
- LUX: 47,000 @ 2M, Zoomed in to 3.5°;
1,900 @ 2M, Zoomed out to 38°

CONTROL:

- Control Modes: DMX512, RDM, Art-Net & Kling-Net
- Multiple DMX channel modes
- Tilt & Tilt Fine: 220°
- Strobe & Pulse Effects
- 6 individually controlled Pixels
- 0-100% Dimming + 16-bit Fine Dimming
- 6 Preset Dim Curve Modes plus Dim Speed control
- With Wired Digital Communication Network

Individual
Pixel Control
of Each Cell



ALLEGRO Z6



CONSTRUCTION:

- Display: OLED display with function buttons
- 5-pin DMX In/Out for data linking
- RJ45 In/Out for Art-Net & Kling-Net control
- Locking power In/Out to daisy chain up to 6 fixtures (@ 120V), 12 fixtures (@ 230V)

ELECTRICAL:

- Power voltage: AC100-240V, 50/60Hz (Multi-voltage)
- Power consumption: 240W max

DIMENSIONS & WEIGHT:

- Dimension (LxWxH): 19.6" x 4.5" x 11" / 500x113x278mm
- Weight: 21 lbs. / 9.5kg.

WHAT'S INCLUDED:

- Two Omega Brackets
- Locking power cord