




# **IPC415™**



attached to the M10 rigging point in the center of the unit.

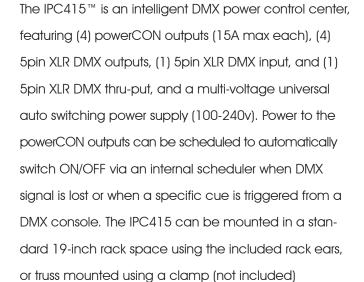

## **FEATURES**

2 DMX Control Modes (1 / 4)

Internal On/Off Scheduler

- (1) 5pin XLR DMX Input
- (1) 5pin XLR DMX Output Thru-Put
- (4) 5pin XLR DMX Outputs
- (4) powerCON Outputs (NAC3MPB-1)

Main 20 amp Power Switch

powerCON Power Input (NAC3MPA-1)

19-Inch Rack Mount Ears (included)

M10 Rigging Center Point for Truss Mounting\*





#### **SPECIFICATIONS**

#### **CONTROL / CONNECTIONS**

(2) DMX Channel Modes (1 /4)
Push Button / Encoder Wheel
Internal On/Off Scheduler
OLED Control Menu Display
5pin XLR DMX Input
5pin XLR DMX Output (Thru-put)
(4) 5pin XLR DMX Outputs
(4) powerCON 15 amp Outputs (NAC3MPB-1)
Main 20 amp Power Switch
powerCON Power Input (NAC3MPA-1)

# SIZE / WEIGHT

Length: 19.0" (482mm) Width: 9.1" (232mm) Vertical Height: 1.7" (44mm) Weight: 6.6 lbs. (3.0kg)

### **ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz

7W Max Power Consumption (No Devices Connected) 35°F (2°C) to 113°F (45°C)

#### **APPROVALS**

CE




## **INCLUDED ACCESSORIES**

Rack Ears (fits standard 19-inch single rack space) M10 Screw Hole for Clamp (clamp not included) Safety Cable Loop (cable not included)

#### **DIMENSIONS**





# TRUSS MOUNTABLE (clamp not included)





# ORDERING INFORMATION

ORDER CODE	ITEM
IPC415	Intelligent DMX Power Control Center
PRO-CLAMP	Heavy Duty 2 inch Pro Clamp
SCABLE60	Safety Cable 24" (610mm) 60 lbs. (27kg) Rating
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
PLC10	10 ft. (3m) powerCON Link Cable
	Additional Cable Lengths Available

