

SEVEN
PAR 71P



The SEVEN PAR 71P™ is an IP65 outdoor rated seven color par wash luminaire with (7) 25W 7-in-1 RGBAW + Lime + UV LEDs (Red, Green, Blue, White, Amber, Lime, and a 395nm UV) producing 3,600 total output lumens and 90CRI. Features include individual hue, saturation, and intensity control, RGB + dynamic amber channel modes, 17° beam and 33° field angles, smooth color mixing, 12 internal programs with speed and fade control, 64 unique 7-color macros, selectable dimming curve modes, adjustable LED refresh rate and gamma brightness for flicker free operation for TV and FILM, DMX and RDM (Remote Device Management) protocol support, IP65 rated 5pin XLR and power in/out connections, dual adjustable yoke / floor stand, multiple unit power linking, OLED menu display with a 4-button control panel, a multi-voltage universal auto switching power supply (100-240v), and a rugged powder coated die-cast aluminum exterior. Gel frame and gel frame holder included, optional 4-leaf barn door available.

FEATURES

- IP65 Outdoor Rated Seven Color Par Wash Luminaire**
- (7) 25W 7-in-1 RGBAW + Lime + UV (395nm) LEDs**
- 3,600 Total Output Lumens | 90CRI**
- Individual Hue, Saturation, and Intensity Control**
- RGB + Dynamic Amber Channel Modes**
- 17° Beam and 33° Field Angles**
- Smooth Color Mixing**
- 12 Internal Programs with Speed and Fade Control**
- 64 Unique 7-Color Macros**
- Selectable Dimming Curve Modes**
- Adjustable LED Refresh Rate + Gamma Brightness**
- Flicker Free Operation for TV and FILM**
- DMX and RDM Protocol Support**
- IP65 Rated 5pin DMX and Power In/Out**
- Dual Adjustable Yoke / Floor Stand**
- Multiple Unit Power Linking**
- Rugged Powder Coated Die-Cast Aluminum Exterior**
- Gel Frame and Gel Frame Holder Included**
- Optional 4-Leaf Barn Door Available**



ELATION | SEVEN PAR 71P™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional 07/05/18

PRODUCT SPECIFICATIONS

SOURCE

(7) 25W 7-IN-1 RGBAW + Lime + UV (395nm) LEDs
50,000 Hour Average LED Life*

*May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

3,600 Total Output Lumens | 90CRI
6,819 LUX 634 FC @6.6' (2m) (Full ON)

EFFECTS

Individual Hue, Saturation, and Intensity Control
RGB + Seven Color 3 Channel DMX Mode
12 Internal Program Macros w/Speed and Fade Control
64 Unique 7-Color Macros
Selectable Dimming Curve Effects

COLOR

RGBAW + Lime + UV (395nm)

CONTROL / CONNECTIONS

(7) DMX Channel Modes (15 total channels)
DMX and Manual Control
4 Button Control Panel
180° Reversible OLED Menu Display
Adjustable Refresh Rate (900-25,000 Hz)
Adjustable Gamma Brightness (2.0, 2.2, 2.4, 2.8)
RDM (Remote Device Management) Protocol Support
IP65 5pin DMX and Power In/Out

SIZE / WEIGHT

Length: 11.24" (286mm)
Width: 10.71" (272mm)
Vertical Height: 7.36" (187mm)
Weight: 11.0 lbs. (5.0kg)


ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
185W Max Power Consumption
5°F to 113°F (-15°C to 45°C)

APPROVALS / RATINGS



DIMENSIONAL DIAGRAMS

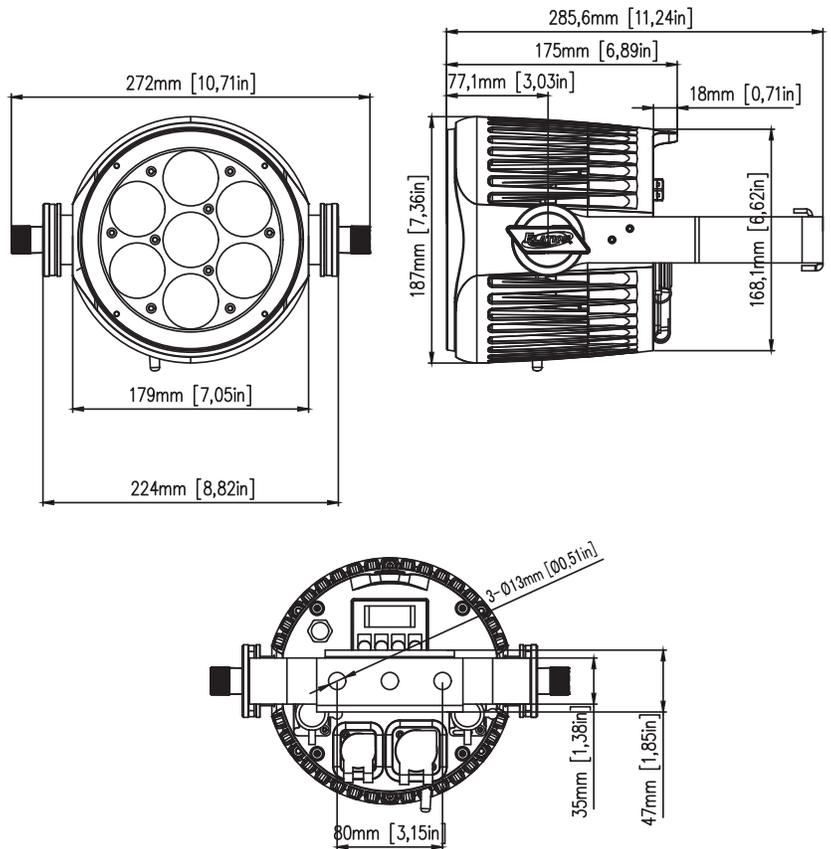

Optional 4-Leaf Barn Door

ORDERING INFORMATION

SEV001	SEVEN PAR 7IP™
QUICK RIG CLAMP	Low Profile Quick Release Clamp
SIXPAR/BD100	Barn Door for SEVEN PAR 7IP
STR514	3 ft. (1m) IP65 Seetronic 5pin XLR Cable
NEU088	3 ft. (1m) Power Link Cable
	Additional cable lengths available

Specifications are subject to change without notice ©Elation Professional 07/05/18



Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu