


DT 4030/3 HEAVY TRUSS

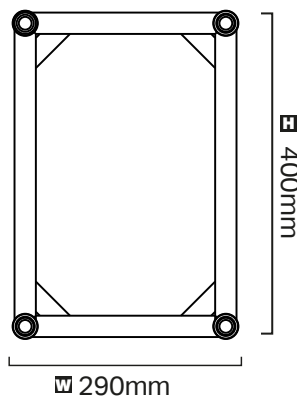

W 290mm

Ø 50mm

DT 4030/3-050

Code: 1794030001 **L** 500mm **KG** 6.4

DT 4030/3-100

Code: 1794030002 **L** 1000mm **KG** 10.1

DT 4030/3-150

Code: 1794030003 **L** 1500mm **KG** 13.4

DT 4030/3-200

Code: 1794030004 **L** 2000mm **KG** 16.6

DT 4030/3-250

Code: 1794030005 **L** 2500mm **KG** 19.9

DT 4030/3-300

Code: 1794030006 **L** 3000mm **KG** 23.9

DT 4030/3-350

Code: 1794030007 **L** 3500mm **KG** 26.8

DT 4030/3-400

Code: 1794030008 **L** 4000mm **KG** 30.1

DT 4030/3-BOX

CODE: 1794030011



L 290mm **W** 290mm **H** 400mm
KG 9.6



DT 4030 FCBC

Female Connector Box Corner

Code: 1723400042

DT 4030 CC

Conical Connector

Code: 1723400040

DT 4030 STEEL PIN

Code: 1723400043

DT 4030 SAFETY CLIP

Code: 1723400044

DT 4030 STEEL PIN M10

Code: 1723400045

DT 4030/3-BOOK CORNER

Code: 1794010012

LOAD CHART - EN-1090 - EUROCODE

Length (m)	6	8	10	12	14	16	18
Point load (kg)	1392	1045	833	688	592	501	421
Deflection (mm)	16.8	30.2	47.7	69.5	97	126	156.3
Distrib. load (kg/m)	464	261	167	115	85	63	47
Deflection (mm)	20.9	37.5	59.2	85.8	119.3	154.1	190

TECHNICAL DATA

Tube diameter: 50mmx3mm (2 x 0.12 inch)
Cross brace diameter: 25mmx3mm (1 x 0.12 inch)
Material: Alloy EN-AW 6082 T6 (AlMgSi1 T6)



Connector Set
incl. with each Truss part

4x

8x

8x

LOAD CHART - EN-1090 - Eurocode

