



LEVEL Q7™

SKU# **LEV054**

The new Level Q7™ features (7) 15W QUAD color RGBW LEDs, 7° beam and 13° field angles, color correction (2,700K - 7,200K), electronic strobe (1-18 fps) and dimming (0-100%), flicker free operation for TV and FILM, rugged die-cast aluminum exterior, rubber padded base with dual yoke / floor stand, multiple unit power linking, 127W max power consumption, a multi-voltage universal auto switching power supply (120-240v), and gel frame, gel frame holder, and filter gel included.

FEATURES

- (7) 15W QUAD Color RGBW LEDs**
- 3636 LUX 388 FC @16.4' (5M)**
- 7° Beam and 13° Field Angles**
- Color Correction (2,700K - 7,200K)**
- Electronic Strobe (1-18 fps) and Dimming (0-100%)**
- Flicker Free Operation for TV and FILM**
- Rugged Die-Cast Aluminum Exterior**
- Rubber Padded Base with Dual Yoke / Floor Stand**
- Multiple Unit Power Linking**
- 127W Max Power Consumption**
- Gel Frame, Gel Frame Holder, and Filter Gel Included**



ELATION | LEVEL Q7™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

7° Beam 13° Field Angles
2,700K - 7,200K Color Correction
 Flicker Free Operation for TV and FILM
Rugged Die-Cast Aluminum Exterior
Rubber Padded Base with Dual Yoke / Floor Stand
Multiple Unit Power Linking
Gel Frame, Gel Frame Holder, and Filter Gel Included

SOURCE

(7) 15W QUAD Color RGBW LEDs
100,000 Hour Average Life

PHOTOMETRIC DATA

3636 LUX 388 FC @16.4' (5M)

EFFECTS

Electronic Strobe and Varying Settings
Color and Chase Macros
Electronic Dimming: 0% - 100%

CONTROL / CONNECTIONS

(4) DMX Channel Modes (4/5/7/9)
(4) Button Control Panel
LCD Menu Display
5pin DMX In/Out
powerCON In/Out

SIZE / WEIGHT

Length: 11.0" (278.6mm)
Width: 5.5" (140.5mm)
Vertical Height: 10.2" (260mm)
Weight: 9.0 lbs. (4 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
127W Max Power Consumption
Multiple Unit Power Linking
-13°F to 113°F (-25°C to 45°C)

APPROVALS / RATINGS

CE Approved
cETLus Approved
IP20 Rated

INSTALLATION

Rigging: Integrated Dual Yoke / Floor Stand
Working Position: Any (360°)

INCLUDED ITEMS


(1) powerCON Cable
(1) 5pin XLR Cable
(1) Safety Cable
(1) Gel Frame, Gel Frame Holder, and Filter Gel



GEL FRAME HOLDER KIT
SKU RLEV054-GFH


PHOTOMETRIC DATA

RED LEDs	190 FC / 2046 LUX	43 FC / 467 LUX	19 FC / 200 LUX
GREEN LEDs	596 FC / 6420 LUX	145 FC / 1565 LUX	64 FC / 693 LUX
BLUE LEDs	88 FC / 950 LUX	23 FC / 249 LUX	10 FC / 113 LUX
WHITE LEDs	695 FC / 7485 LUX	176 FC / 1890 LUX	79 FC / 850 LUX
FULL ON	1366 FC / 14,700 LUX	338 FC / 3636 LUX	149 FC / 1601 LUX

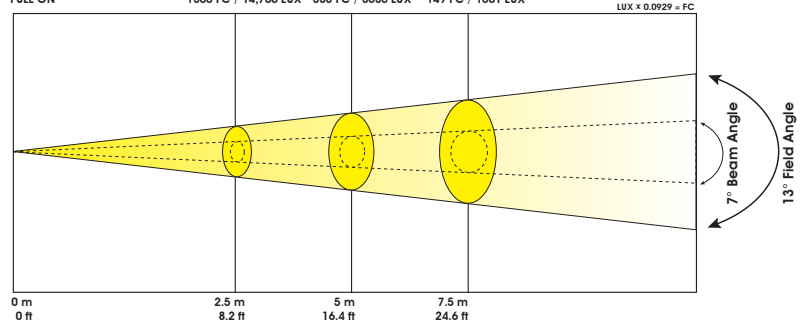

7° Beam Angle	Ø 0.32 m / Ø 1.0 ft	Ø 0.62 m / Ø 2.0 ft	Ø 0.92 m / Ø 3.0 ft
13° Field Angle	Ø 0.57 m / Ø 1.9 ft	Ø 1.12 m / Ø 3.7 ft	Ø 1.66 m / Ø 5.4 ft

DIMENSIONAL DIAGRAM

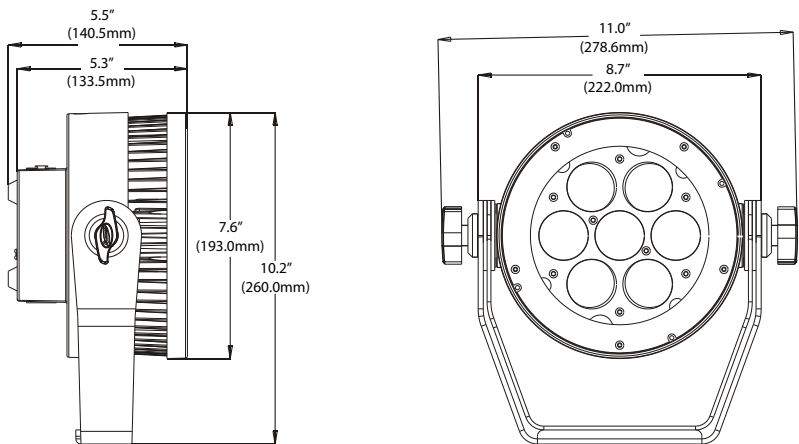

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
NARROW CLAMP	2" Pro Wrap Around Clamp
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
AC5PDMX10PRO	10 ft. (3m) 5pin PRO DMX Cable
AC5PDMX15PRO	15 ft. (4.5m) 5pin PRO DMX Cable
AC5PDMX25PRO	25 ft. (7.5m) 5pin PRO DMX Cable
AC5PDMX50PRO	50 ft. (15m) 5pin PRO DMX Cable
AC5PDMX100PRO	100 ft. (30m) 5pin PRO DMX Cable
PLC3	3' (1m) PowerCON PRO Link Cable
PLC6	6' (1.8m) PowerCON PRO Link Cable
PLC10	10' (3m) PowerCON PRO Link Cable
PLC15	15' (4.5m) PowerCON PRO Link Cable
LEV054-GFH	Gel Frame Holder Kit (7.88" Slot Holder, Gel Frame, and (4) Screws)
LEV054-GFH-S4	Source 4 Accessory Holder (7.50" Slot Holder and (4) Screws)
LSF536	Light Shaping Filter 30" 20" x 24" Sheet
LSF537	Light Shaping Filter 20" 20" x 22" Sheet
LSF538	Light Shaping Filter 60" x 1" 20" x 24" Sheet
LSF559	Light Shaping Filter 10" 20" x 24" Sheet