



REPORT

25800 COMMERCENTRE DRIVE, LAKE FOREST, CA 92630

Project No. G101918458

Date: March 17, 2014

REPORT NO. 101918458LAX-022

TEST OF ONE LED PROFILE

MODEL NO. WW PROFILE 26°

RENDERED TO

ELATION PROFESSIONAL
6122 S. EASTERN AVE
COMMERCE, CA 90040 USA

TEST: Electrical and Photometric tests as required to the IESNA test standard.

STATEMENT OF LIMITATION: This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

AUTHORIZATION: The testing performed was authorized by signed quote number Q500519256.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

DESCRIPTION OF SAMPLE: The client submitted one production sample of model number WW PROFILE 26°. The sample was received by Intertek on March 10, 2015, in undamaged condition and one sample was tested as received. The sample designation was LAN1503101019-003.

DATES OF TESTS: March 16, 2015

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SUMMARY

Model No.: WW PROFILE 26°
Description: LED Profile

Criteria	Result	
	Sphere	Goniometer
Total Lumen Output (Lumens)	4805	4923
Total Power (W)	174.3	173.4
Luminaire Efficacy (LPW)	27.57	28.39

Criteria	Result
Power Factor	0.975
Current ATHD %	4.08
Correlated Color Temperature (CCT - K)	3070
Color Rendering Index (CRI - Ra)	94.3
Color Rendering Index (CRI - R9)	75.7
DUV	0.001
Chromaticity Coordinate (x)	0.431
Chromaticity Coordinate (y)	0.400
Chromaticity Coordinate (u')	0.248
Chromaticity Coordinate (v')	0.519

EQUIPMENT LIST

Equipment Used	Model Number	Control Number	Last Date Calibrated	Calibration Due Date
LabSphere Power Supply	LPS-100-0833	000832	05/23/13	05/20/15
LapSphere 3M Integrating Sphere	CA-11821-LRT	000830	02/25/15	03/25/15
LabSphere Spectrometer	CDS-3020	000834	02/25/15	03/25/15
California Instruments Power Supply	CSW5550	001338	VBU	VBU
Yokogawa Power Meter	WT333	001319	05/10/13	05/15/15
Extech Instruments Stop Watch	C-510	000351	09/25/14	09/25/15
Temperature Humidity Meter	971	001178	12/22/14	12/22/15
LSI High Speed Mirror Goniometer	6440T	000943	02/25/15	03/25/15
Elgar Power Supply	CW1251	000944	VBU	VBU
Yokogawa Power Analyzer	WT210	000945	11/26/14	11/26/15
Temp. & RH Meter	971	001178	12/22/14	12/22/15
Extech Instruments Stop Watch	365510	001390	12/08/14	12/08/15
Tape Measure	33-430	001491	12/08/14	12/08/15



TEST METHODS

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IESNA LM-79.

Photometric and Electrical Measurements – Integrating Sphere Method

A Labsphere CDS 3020 Spectrometer and Three Meter Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation. Each SSL unit was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

The calibration of the sphere spectrometer system is traceable to the National Institute of Standards and Technology.

Photometric and Electrical Measurements – Distribution Method

A LSI Type C High Speed Model 6440 Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for each sample.

Ambient temperature was measured equal to the height of the sample mounted on the Goniometer equipment. Each sample was operated at input rated voltage in its designated orientation. Each sample was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

Some graphics were created with Photometrics Plus software.

RESULTS OF TEST

Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) - Integrating Sphere Method


Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Current ATHD (%)	Luminous Flux (Lumens)	Lumen Efficacy (LPW)
LAN1503101019-003	UP	119.9	1491	174.3	0.975	4.08	4805	27.57

Correlated Color Temperature (K)	CRI -Ra	CRI -R9	DUV	CIE 31' Chromaticity Coordinate	CIE 31' Chromaticity Coordinate (y)	CIE 76' Chromaticity Coordinate (u')	CIE 76' Chromaticity Coordinate (v')
3070	94.3	75.7	0.001	0.431	0.400	0.248	0.519

Spectral Distribution over Visible Wavelengths

nm	mW/nm								
350	-0.162	440	15.830	530	35.750	620	61.890	710	18.660
355	-0.225	445	23.900	535	37.440	625	62.790	715	16.390
360	-0.138	450	31.280	540	39.210	630	63.000	720	14.400
365	-0.188	455	31.570	545	40.800	635	62.560	725	12.560
370	-0.083	460	25.650	550	42.250	640	61.410	730	10.780
375	-0.107	465	20.340	555	43.590	645	59.560	735	9.226
380	-0.080	470	17.190	560	44.720	650	57.310	740	7.947
385	-0.089	475	15.110	565	45.840	655	54.590	745	6.798
390	-0.074	480	14.600	570	46.770	660	51.600	750	5.828
395	-0.014	485	15.740	575	47.740	665	48.300	755	4.978
400	0.050	490	17.810	580	48.770	670	44.790	760	4.317
405	0.202	495	20.450	585	49.880	675	41.110	765	3.664
410	0.526	500	23.290	590	51.050	680	37.510	770	3.118
415	1.184	505	25.960	595	52.550	685	33.820	775	2.642
420	2.279	510	28.250	600	54.620	690	30.250	780	2.257
425	4.061	515	30.290	605	56.780	695	26.960		
430	6.605	520	32.210	610	58.790	700	23.970		
435	10.290	525	33.900	615	60.610	705	21.180		

Spectral Data Over Visible Wavelengths

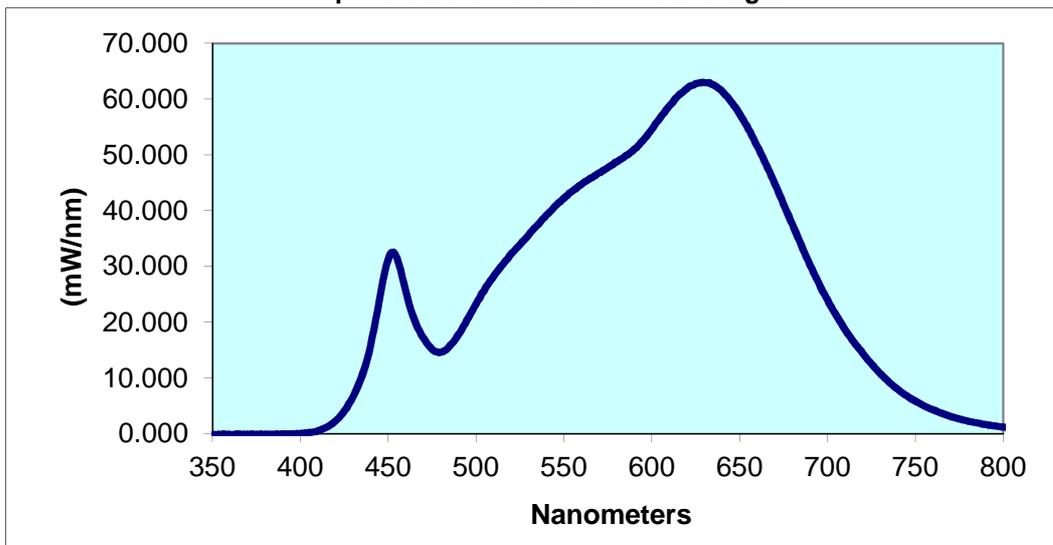

RESULTS OF TEST (cont'd)


Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
LAN1503101019-003	UP	120.0	1533	173.4	0.942	4923	28.39

Intensity (Candlepower) Summary at 25°C - Candelas

Maximum Candela Value: 38,316.9

Angle	0	22.5	45	67.5	90
0	32477	32477	32477	32477	32477
5	35325	35240	35201	34973	34930
10	35962	36270	36106	36314	36575
15	40	41	18	63	56
20	29	13	27	10	23
25	20	23	14	17	16
30	12	9	7	14	13
35	0	16	2	11	2
40	0	12	16	0	13
45	9	0	0	7	0
50	0	0	21	16	8
55	26	2	0	0	6
60	0	4	0	5	0
65	0	0	0	0	0
70	0	0	9	1	4
75	0	0	0	0	15
80	7	2	0	6	0
85	0	0	0	3	11
90	7	0	0	0	9

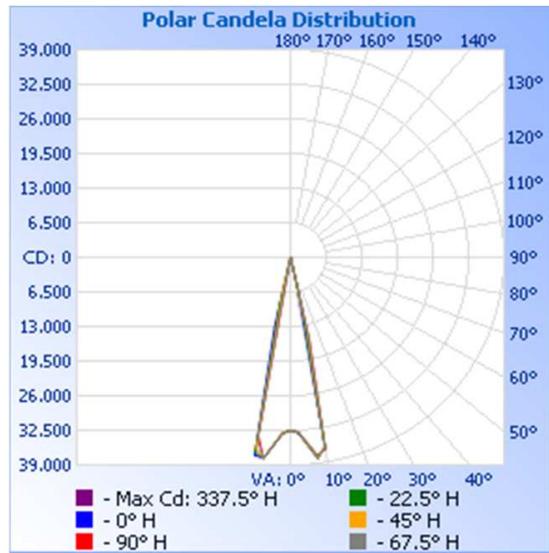


RESULTS OF TEST (cont'd)


Illumination Plots

Mounting Height: 10 ft.

Illuminance - Cone of Light

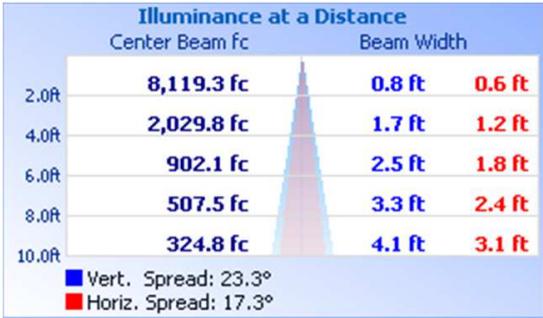

Isoillumination Plot

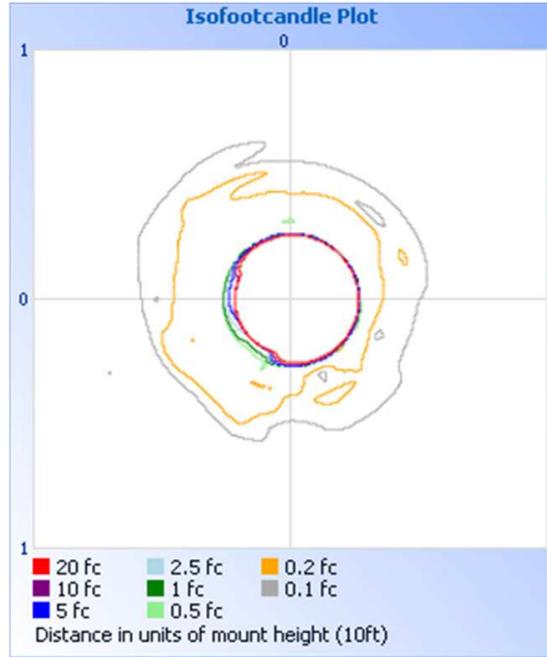

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens	% Luminaire
0-30	4901	99.5
0-40	4904	99.6
0-60	4912	99.8
60-90	10.3	0.2
0-90	4923	100.0
90-180	0.3	0.0
0-180	4923	100.0

Zonal Lumens and Percentages at 25°C

Zone	Lumens	% Luminaire
0-10	3439	69.9
10-20	1450	29.5
20-30	11.3	0.2
30-40	3.9	0.1
40-50	3.1	0.1
50-60	4.9	0.1
60-70	3.7	0.1
70-80	3.6	0.1
80-90	3.0	0.1
90-100	0.3	0.0

PICTURE (not to scale)



CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:



Ameet Alawi
Technician
Lighting Division

Attachment: None

Report Reviewed By:



Kenda Branch
Lighting Performance Team Lead
Lighting Division