
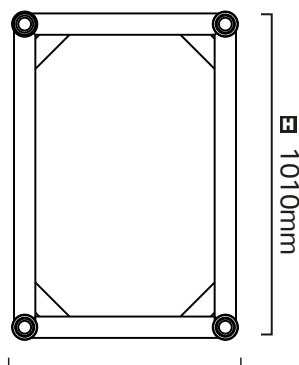


DT 104/6 HEAVY TRUSS

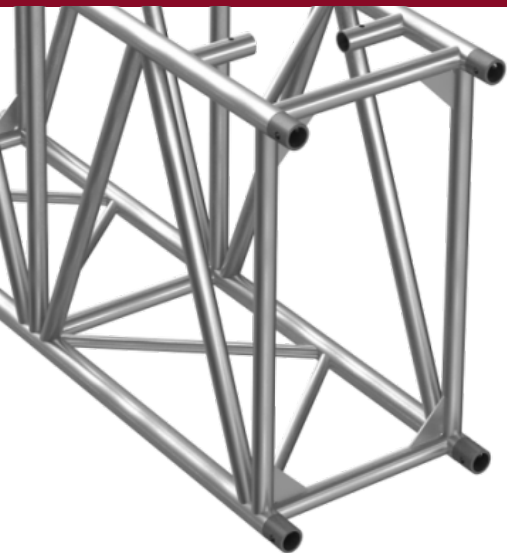

W 580mm

Ø 60mm

DT 104/6-100

Code: 1791040001 **L** 1000mm **KG** 30.0

DT 104/6-200

Code: 1791040002 **L** 2000mm **KG** 50.0

DT 104/6-300

Code: 1791040003 **L** 3000mm **KG** 70.0

DT 104/6-T35

Code: 1791040005

DT 104/6-CC

Conical Connector

Code: 1791040011

DT 104/6-HC M16

Code: 1799000002

DT 104/6-STEEL PIN


Code: 1791040012

DT 104/6-SAFETY CLIP

Code: 1791040013

DT 104/6-C41

CODE: 1791040004



L 580mm **W** 580mm **H** 1010mm **KG** 32.5



LOAD CHART - EN-1090 - EUROCODE

Length (m)	8	10	12	14	16	18	20	22	24	26	28	30	32	34
Point load (kg)	5880	5157	4513	4000	3570	3196	2861.7	2557.8	2300.7	2079.6	1886.8	1716.7	1564.9	1428.4
Deflection (mm)	9.8	16.9	25.8	36.8	49.7	64.4	80.7	98.3	117.7	139.1	162.5	188	215.7	245.7
Distrib. load (kg/m)	1441.6	1148,7	835.7	607.9	460	358.7	286.2	232.5	191.7	160	134.8	114,4	97.8	84
Deflection (mm)	11.9	23.3	35.4	48.3	63.1	80	98.9	119.9	142.9	168.1	195.3	224.8	256.4	290.2

TECHNICAL DATA

Tube diameter: 60mmx6mm (2.4 x 0.24 inch)
 Cross brace diameter: 30mmx3mm (1.2 x 0.12 inch)
 Material: Alloy EN-AW 6082 T6 (AlMgSi1 T6)



LOAD CHART - EN-1090 - Eurocode

